

CROMPTON INSTRUMENTS EARTH LEAKAGE RELAY-ELPR 2 MODELS AVAILABLE



**MONITORS THE EARTH LEAKAGE CURRENT
THROUGH CORE BALANCED CURRENT
TRANSFORMERS**

KEY FEATURES

- Easy operation
- CBCT connection fault detection
- True RMS Measurement up to 15th harmonic
- Programmable parameter
- Trip Delay

TE Connectivity's (TE) Crompton Instruments Earth Leakage Protection Relay, a protection device to be used in electrical installations against electric shock and or damage to equipment caused by punctured or weak insulations or contact to live parts.

Instrument operates by monitoring the earth leakage current through CBCT and disconnecting the circuit in case of hazardous levels of earth leakage currents.

Two versions available, Smart and Smart+.

APPLICATIONS

- Motor protection
- Mining equipment
- Industrial premises
- Substation premises

RELEVANT STANDARDS AND TEST REPORTS

- IEC 61326.
- IEC 60947-2 : Annex - M
- IEC60755 (Optional)
- IEC 61010-1- 2001

ORDERING INFORMATION

EXAMPLE PART NUMBERS:

ELR2 - XX - X - XX - 00000000

Earth Leakage Relay POT

Auxiliary Supply:

L - 20 - 60 DC / 20 - 40 AC

M - 60 - 300 AC / DC

Model and Additional Outputs:

BZ - Smart

BR - Smart with Alarm Relay

AR -Smart+*


* Smart+ model with DIP switch. Following configurations possible through DIP switch.

1. Auto-reclousure (Reset) or manual reset selection for reset of relay when currents are normal after fault condition is removed
2. Configuration option of 1 NO relay (Alarm Relay or Fail Safe Relay)
3. Main Relay configuration as Energized or De-energised

NOTE:

1. Energized configuration : Relay Pole and NO contacts become energized (ON) upon fault.
2. De-Energized configuration : Relay Pole and NO contacts become De-energized (OFF) upon fault.


DIMENSIONAL INFORMATION

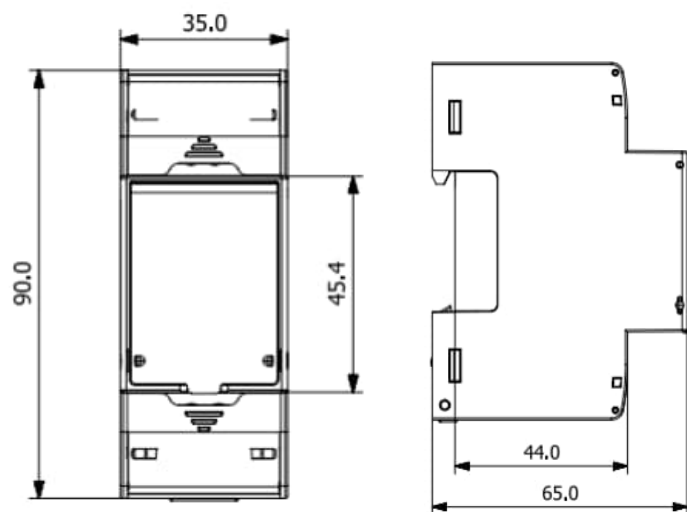

TERMINAL DETAILS

Alarm / FS RELAY		CBCT IN		EXT RST SW	
COM	NO	IN	OUT	Y2	Y1
↑	↑	↑	↑	↑	↑
1	2	3	4	5	6
↓	↓	↓	↓	↓	↓
7	8	9	10	11	12
ELR Relay			AUX		
NO	COM	NC	L	N	

CONNECTION DIAGRAM

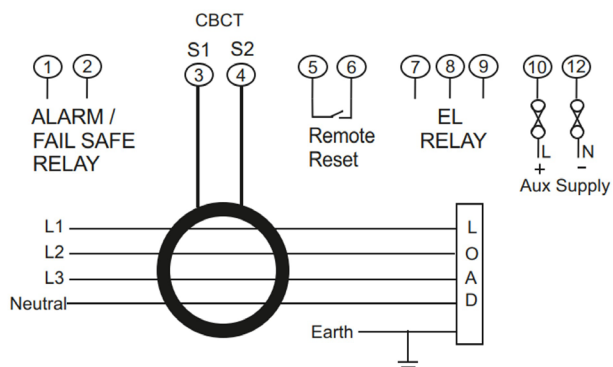

TECHNICAL SPECIFICATIONS

Input characteristics	
Leakage current (In)	30mA to 30A (Type A)
Tripping operating range	80 % to 100% of In
Alarm operating range	> 50 % of In
Resetting value	- 15 % of operating range
Auxiliary Supply	
Auxiliary supply option1	60V-300V AC / DC
Auxiliary supply option	2 20-60V DC / (20-40 VAC)
Auxiliary supply frequency	45 to 66 Hz range
Auxiliary supply burden	< 4 VA approx.
Accuracy	
Leakage current	+ 5% of full scale
Trip Delay (Including Setting Accuracy)	+ 5% of set trip time or 50ms (whichever is greater)
Instantaneous Trip function	< 25 millisecond for leakage current greater than 5 times (5x) set In*.
Reference Conditions for Accuracy	
Reference temperature	23°C +/- 2°C
Input Waveform	Sinusoidal (distortion factor 0.005)
Input frequency	50/60 Hz ± 2%
Auxiliary supply voltage	230 ± 1%
Auxiliary supply frequency	50 or 60 Hz ±2%

TECHNICAL SPECIFICATIONS

Applicable Standards	
EMC	IEC 61326-1:2012 Table2
Terms, definitions & Test method	IEC 60688
Immunity	IEC 61000-4-3 10 V/m Min - Level 3
Safety	IEC 61010-1-2001, Permanently connected use
IP for water & dust	IEC60529
Pollution degree	2
Installation category	III 300 V
High Voltage Test	2.2 kV AC, 50Hz for 1 minute between all electrical circuits
Environmental:	
Operating temperature	- 20 to + 65°C
Storage temperature	- 40 to + 70°C
Relative humidity	0... 90% (non condensing)
Shock (As per IEC60068-2-27)	Half sine wave, Peak acceleration 30 gn (300 m/s ²), duration 18ms 10... 150...10 Hz, 0.15mm amplitude
Number of Sweep cycles	10 per axis
Relay Contacts	
Relay 1 (ELR) output	1 NO + 1 NC (1 CO)
Relay 2 (Alarm / FS) output	1 NO
Contact rating	5A / 250 VAC or 30VDC
Mechanical endurance	1 x 10 ⁷ OPS
Electrical endurance	5 x 10 ⁴ OPS (Resistive Load)
Remote Reset	
Operation	Non potential free (Voltage level 12 VDC Approx), Isolated contacts for remote resetting of ELR and alarm relay.
Mechanical	
Housing dimensions	90 x 65 x 35 mm As per DIN 43880
Weight	125 Gram Approx.
*Note : 5x current measurement not applicable for 30A range	

CROMPTON INSTRUMENTS

CORE BALANCE CURRENT TRANSFORMER

Exclusively for use with our ELR earth leakage protection relays. The extremely sensitive toroidal core and secondary winding are encapsulated by a self extinguishing case providing excellent mechanical strength, protection from damage, and electrical insulation.

5 APERTURE SIZES



APPLICATIONS

- Switchgear
- Distribution systems
- Generator sets
- Control panels
- Motor protection
- Transformer protection
- Overload protection

KEY FEATURES

- Compact design, reliable & accurate
- Common wall mouting clamp for all sizes
- Protective cap for connectors
- Side & vertical mounting provision
- Cable tie for holiding Busbar/Cables
- Sealable cap for secondary terminal connections

RELEVANT STANDARDS AND TEST REPORTS

- Conformity to Standard IEC 61869-1

Model	MOUNTING CLAMP (VERTICAL MOUNTING)	MOUNTING CLAMP (HORIZONTAL MOUNTING)	CABLE TIE (VERTICAL MOUNTING)	CABLE TIE CLIP (BUSBAR MOUNTING)	TERMINAL CAP	Size	Weight
XLCBCT-038	✓	X	✓	X	✓	38-71 (20)	0.12 Kg
XLCBCT-057	✓	✓	✓	X	✓	57-97 (20)	0.15 Kg
XLCBCT-070	✓	✓	✓	X	✓	70-109 (20)	0.18 Kg
XLCBCT-120	✓	✓	✓	✓	✓	120-153 (20)	0.29 Kg
XLCBCT-210	✓	✓	✓	✓	✓	210-250 (20)	0.51 Kg

crompton-instruments.com

Learn more: TE.com/energy

© 2024 TE Connectivity. All Rights Reserved. EPP-4293-DDS-05/24

TE, TE Connectivity, TE connectivity (logo), EVERY CONNECTION COUNTS, are trademarks owned or licensed by TE Connectivity. Other logos, product and company names mentioned herein may be trademarks of their respective owners. While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions, specifications, and/or information contained herein are for reference purposes only and are subject to change without notice. Consult TE for the latest dimensions, specifications, and/or information. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

Connect with us:
TE.com/energy

