

8 7 6 5 4 3 2 1

H
G
F
E
D
C
B
A



Smart Passive Pulse Splitter


Type PPS3

- Inputs 1
- Outputs 3
- Maximum working voltage 24V DC
- Current 40mA Maximum
- Signal voltage drop 1.4V
- Input channel isolation 75V max
- Connection - screw terminals Inputs 1
- Outputs 3

H
G
F
E
D
C
B
A

CAMAX UK LTD Spa Lodge 2, Spa Street, Harrogate, North Yorkshire HG2 7LE	DESCRIPTION: PPS3 Pulse splitter specifications			
	Copyright © CAMAX Drawing and design remains the property of CAMAX UK LTD and must not be reproduced without permission.			
Tel: 01423 880440	DATE 08/2011	Drawn by: SV	DWG NO	REV
Fax: 01423 880990	SCALE NTS	SHEET		1 OF 2

8 7 6 5 4 3 2 1

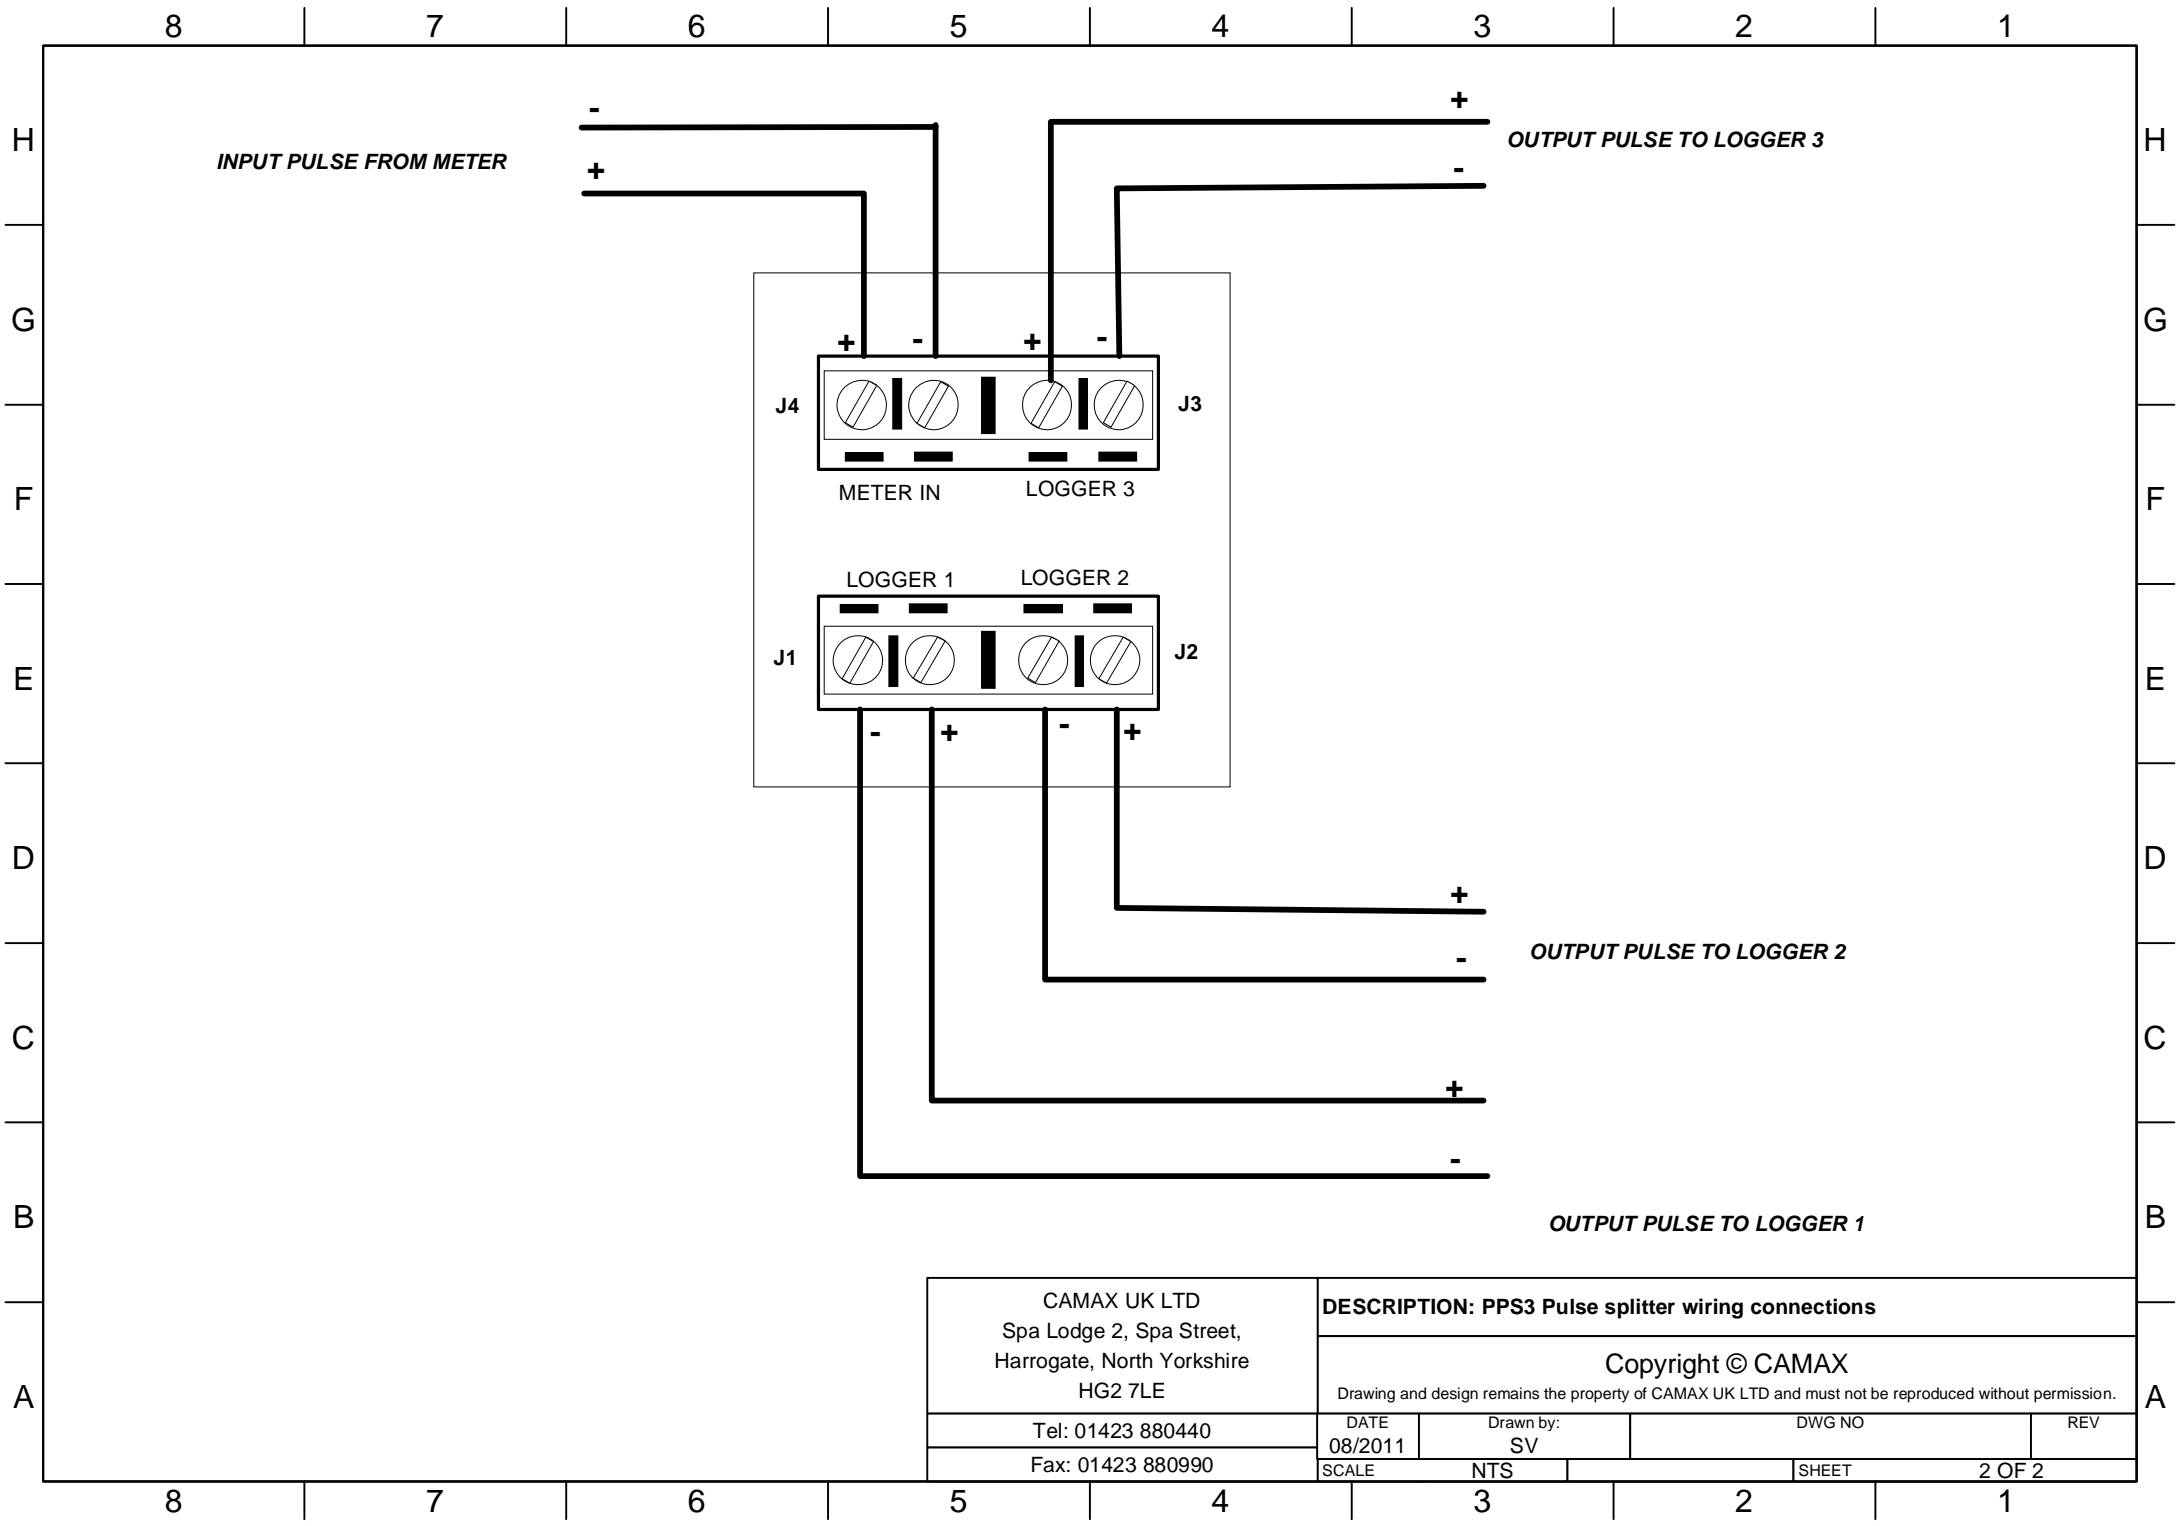

CAMAX UK LTD Spa Lodge 2, Spa Street, Harrogate, North Yorkshire HG2 7LE		DESCRIPTION: PPS3 Pulse splitter wiring connections			
		Copyright © CAMAX Drawing and design remains the property of CAMAX UK LTD and must not be reproduced without permission.			
Tel: 01423 880440		DATE 08/2011	Drawn by: SV	DWG NO	REV
Fax: 01423 880990		SCALE NTS	SHEET 2 OF 2		